


DYNAPACE / / / / / / / / / / *Edge Carry Transfer Conveyors*

500 Series

Features:

- Power Width Adjustment
- 500 Manual
- 510 Follow the Leader
- 520 Numeric Entry

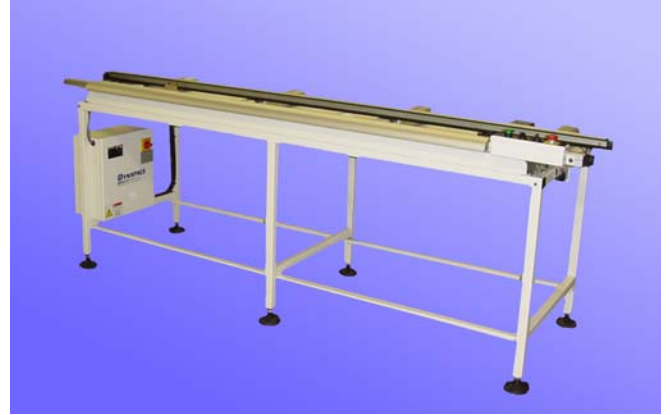

400 Series


Features:

- Hand Crank Width Adjustment

300 Series

Features:

- Precision Quick Width Adjustment
- Quick release handle
- Precision slide bars

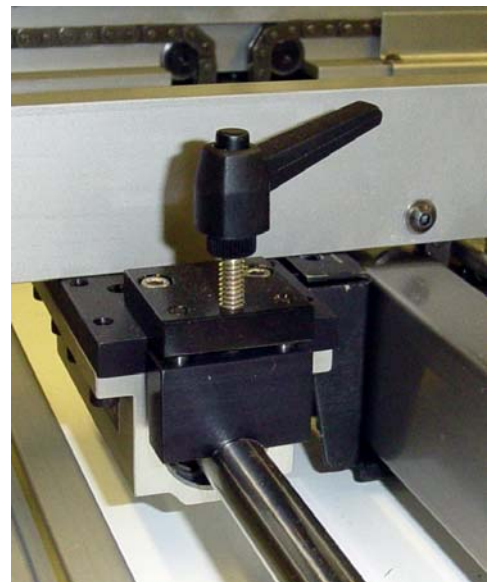

Edge Carry Transfer Conveyors

Standard Features:

- Available Lengths: .5 & 1-Meter, 24" & Custom
- Programmable Logic Controller
- Variable Speed 10-45 fpm (3 – 13.7mpm) other speeds available
- Operator controls (E-stop, Reset, Release, Audit/Bypass)
- "Look-up" product sensor
- Left to right travel, front fixed rail
- ESD grounding receptacle
- Aluminum frame with painted steel panels
- Conforms to SMEMA Spec. 1.2 & NFPA 79
- Includes 1 standard communications cable

Product Handling Capability:

Edge Contact:	0.187" (5mm) Others Available
Length:	3" – 20" (76mm - 508mm)
Width:	3" – 18" (76mm - 457mm)
Thickness:	0.045" (1.1mm) minimum
Weight:	Up to 5 lbs (2.7kg) per foot
Above board clearance:	N/A
Below board clearance:	0.5" (13mm)

Facilities Requirements:

Electrical:	115 VAC/15 amp
Air:	N/A
Line height:	37" +/- 1" (940mm +/- 25.4mm) <i>with 6" above floor clearance for utility track</i>
Footprint:	XX" L x 34"W (XXL x 864mm W)

Available Options

- Custom Lengths & Widths
- Steel Frame
- Multiple Drive Sections
- Various Belt & Chain Profiles
- Thin board capability with No Dive
- Cooling Hoods
- Continuous run without PLC
- Built in Storage & Tool Cabinets
- Custom Colors
- Workstations Packages
- Light Tower & Audible Alarm